



**Lexan\* Resin ML6411**

**Asia Pacific: COMMERCIAL**

Lexan\* ML6411 polycarbonate (PC) siloxane resin, is a high flow opaque injection molding (IM) grade with very low temperature ductility characteristics. This grade offers UL94 V0 @ 1.5mm and 5VA @ 3.0mm flame retardancy based on non-chlorine, non-bromine FR systems. Lexan ML6411 resin offers excellent processing characteristics with opportunity for shorter IM cycle times compared to standard PC. This product is available in a wide range of opaque colors and is an excellent candidate for a wide range of electrical applications.

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	UNIT	STANDARD
<b>MECHANICAL</b>			
Tensile Stress, yld, Type I, 50 mm/min	62	MPa	ASTM D 638
Tensile Stress, brk, Type I, 50 mm/min	54	MPa	ASTM D 638
Tensile Strain, yld, Type I, 50 mm/min	5	%	ASTM D 638
Tensile Strain, brk, Type I, 50 mm/min	100	%	ASTM D 638
Tensile Modulus, 50 mm/min	2500	MPa	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	95	MPa	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	2600	MPa	ASTM D 790
Tensile Stress, yield, 50 mm/min	62	MPa	ISO 527
Tensile Stress, break, 50 mm/min	58	MPa	ISO 527
Tensile Strain, yield, 50 mm/min	5	%	ISO 527
Tensile Strain, break, 50 mm/min	100	%	ISO 527
Tensile Modulus, 1 mm/min	2350	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	90	MPa	ISO 178
Flexural Modulus, 2 mm/min	2350	MPa	ISO 178
<b>IMPACT</b>			
Izod Impact, notched, 23°C	900	J/m	ASTM D 256
Izod Impact, notched, -30°C	150	J/m	ASTM D 256
Instrumented Impact Total Energy, 23°C	72	J	ASTM D 3763
Izod Impact, notched 80*10*4 +23°C	45	kJ/m <sup>2</sup>	ISO 180/1A
Izod Impact, notched 80*10*4 0°C	30	kJ/m <sup>2</sup>	ISO 180/1A
Izod Impact, notched 80*10*4 -30°C	15	kJ/m <sup>2</sup>	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*4 sp=62mm	50	kJ/m <sup>2</sup>	ISO 179/1eA
<b>THERMAL</b>			
Vicat Softening Temp, Rate B/50	134	°C	ASTM D 1525
HDT, 1.82 MPa, 3.2mm, unannealed	114	°C	ASTM D 648
HDT, 0.45 MPa, 6.4 mm, unannealed	128	°C	ASTM D 648
HDT, 1.82 MPa, 6.4 mm, unannealed	119	°C	ASTM D 648
CTE, -40°C to 40°C, flow	7.7E-05	1/°C	ASTM E 831
CTE, -40°C to 40°C, xflow	5.9E-05	1/°C	ASTM E 831
CTE, -40°C to 40°C, flow	7.E-05	1/°C	ISO 11359-2
CTE, -40°C to 40°C, xflow	7.E-05	1/°C	ISO 11359-2

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.  
4) Own measurement according to UL.

Source, GMD, Last Update:04/21/2005

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA. **DISCLAIMER:** THE MATERIALS AND PRODUCTS OF THE BUSINESSES MAKING UP THE GE PLASTICS UNIT OF GENERAL ELECTRIC COMPANY, ITS SUBSIDIARIES AND AFFILIATES ("GEP"), ARE SOLD SUBJECT TO GEP'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, GEP MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (I) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (II) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING GEP MATERIALS, PRODUCTS, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN GEP'S STANDARD CONDITIONS OF SALE, GEP AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS OR PRODUCTS DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of GEP's materials, products, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating GEP materials or products will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of GEP's Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by GEP. No statement contained herein concerning a possible or suggested use of any material, product or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of General Electric Company or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product or design in the infringement of any patent or other intellectual property right.

\* Lexan is a trademark of the General Electric Company

© 1997-2007 General Electric Company. All rights reserved



Lexan\* Resin ML6411

Asia Pacific: COMMERCIAL

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	UNIT	STANDARD
<b>THERMAL</b>			
CTE, -40°C to 40°C, xflow	7.E-05	1/°C	ISO 11359-2
Ball Pressure Test, 125°C +/- 2°C	PASSES	-	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	134	°C	ISO 306
Vicat Softening Temp, Rate B/120	135	°C	ISO 306
HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm	125	°C	ISO 75/Be
HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm	115	°C	ISO 75/Ae
Relative Temp Index, Elec	100	°C	UL 746B
Relative Temp Index, Mech w/impact	100	°C	UL 746B
Relative Temp Index, Mech w/o impact	100	°C	UL 746B
<b>PHYSICAL</b>			
Specific Gravity	1.19	-	ASTM D 792
Mold Shrinkage, flow, 3.2 mm	0.4 - 0.8	%	GE Method
Melt Flow Rate, 260°C/2.16 kgf	7	g/10 min	ASTM D 1238
Density	1.2	g/cm <sup>3</sup>	ISO 1183
Water Absorption, (23°C/sat)	0.3	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.1	%	ISO 62
Melt Volume Rate, MVR at 260°C/5.0 kg	18	cm <sup>3</sup> /10 min	ISO 1133
<b>ELECTRICAL</b>			
Dielectric Strength, in oil, 3.2 mm	26.5	kV/mm	ASTM D 149
Hot Wire Ignition {PLC}	3	PLC Code	UL 746A
High Ampere Arc Ign, surface {PLC}	1	PLC Code	UL 746A
Comparative Tracking Index (UL) {PLC}	2	PLC Code	UL 746A
Volume Resistivity	> 1.E+15	Ohm-cm	IEC 60093
Comparative Tracking Index	250	V	IEC 60112
<b>FLAME CHARACTERISTICS</b>			
UL Compliant, 94-5VA Rating (3)(4)	3	mm	UL 94 by GE
UL Recognized, 94V-0 Flame Class Rating (3)	1.5	mm	UL 94
UL Recognized, 94-5VA Rating (3)	3	mm	UL 94
UL Recognized, 94-5VB Rating (3)	2	mm	UL 94
Glow Wire Flammability Index 960°C, passes at	1	mm	IEC 60695-2-12
Glow Wire Ignitability Temperature, 1.0 mm	800	°C	IEC 60695-2-13

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.  
4) Own measurement according to UL.

Source, GMD, Last Update:04/21/2005

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA. **DISCLAIMER: THE MATERIALS AND PRODUCTS OF THE BUSINESSES MAKING UP THE GE PLASTICS UNIT OF GENERAL ELECTRIC COMPANY, ITS SUBSIDIARIES AND AFFILIATES ("GEP"), ARE SOLD SUBJECT TO GEP'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, GEP MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (I) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (II) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING GEP MATERIALS, PRODUCTS, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN GEP'S STANDARD CONDITIONS OF SALE, GEP AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS OR PRODUCTS DESCRIBED HEREIN.** Each user bears full responsibility for making its own determination as to the suitability of GEP's materials, products, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating GEP materials or products will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of GEP's Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by GEP. No statement contained herein concerning a possible or suggested use of any material, product or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of General Electric Company or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product or design in the infringement of any patent or other intellectual property right.

\* Lexan is a trademark of the General Electric Company

© 1997-2007 General Electric Company. All rights reserved



**Lexan\* Resin ML6411**

**Asia Pacific: COMMERCIAL**

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	UNIT	STANDARD
<b>FLAME CHARACTERISTICS</b>			
Glow Wire Ignitability Temperature, 1.0 mm	800	°C	IEC 60695-2-13
Glow Wire Ignitability Temperature, 2.0 mm	800	°C	IEC 60695-2-13
Glow Wire Ignitability Temperature, 3.0 mm	800	°C	IEC 60695-2-13

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.  
4) Own measurement according to UL.

Source, GMD, Last Update: 04/21/2005

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA. **DISCLAIMER: THE MATERIALS AND PRODUCTS OF THE BUSINESSES MAKING UP THE GE PLASTICS UNIT OF GENERAL ELECTRIC COMPANY, ITS SUBSIDIARIES AND AFFILIATES ("GEP"), ARE SOLD SUBJECT TO GEP'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, GEP MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (I) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (II) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING GEP MATERIALS, PRODUCTS, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN GEP'S STANDARD CONDITIONS OF SALE, GEP AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS OR PRODUCTS DESCRIBED HEREIN.** Each user bears full responsibility for making its own determination as to the suitability of GEP's materials, products, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating GEP materials or products will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of GEP's Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by GEP. No statement contained herein concerning a possible or suggested use of any material, product or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of General Electric Company or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product or design in the infringement of any patent or other intellectual property right.

\* Lexan is a trademark of the General Electric Company



**Lexan\* Resin ML6411**

**Asia Pacific: COMMERCIAL**

PROCESSING PARAMETERS	TYPICAL VALUE	UNIT
<b>Injection Molding</b>		
Drying Temperature	90 - 100	°C
Drying Time	2 - 4	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	270 - 300	°C
Nozzle Temperature	250 - 290	°C
Front - Zone 3 Temperature	260 - 300	°C
Middle - Zone 2 Temperature	250 - 290	°C
Rear - Zone 1 Temperature	230 - 260	°C
Hopper Temperature	60 - 80	°C
Mold Temperature	60 - 90	°C

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.  
4) Own measurement according to UL.

Source, GMD, Last Update: 04/21/2005

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA. DISCLAIMER: THE MATERIALS AND PRODUCTS OF THE BUSINESSES MAKING UP THE GE PLASTICS UNIT OF GENERAL ELECTRIC COMPANY, ITS SUBSIDIARIES AND AFFILIATES ("GEP"), ARE SOLD SUBJECT TO GEP'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, GEP MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (I) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (II) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING GEP MATERIALS, PRODUCTS, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN GEP'S STANDARD CONDITIONS OF SALE, GEP AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS OR PRODUCTS DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of GEP's materials, products, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating GEP materials or products will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of GEP's Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by GEP. No statement contained herein concerning a possible or suggested use of any material, product or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of General Electric Company or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product or design in the infringement of any patent or other intellectual property right.

\* Lexan is a trademark of the General Electric Company

© 1997-2007 General Electric Company. All rights reserved



Lexan\* Resin ML6411

Asia Pacific: COMMERCIAL


**CALCULATED FLOW LENGTH INDICATION**

**Moldflow® Radial Flow Analysis**

**Lexan® ML6411**

**Melt Temperature : 285°C**

**Mold Temperature : 75°C**

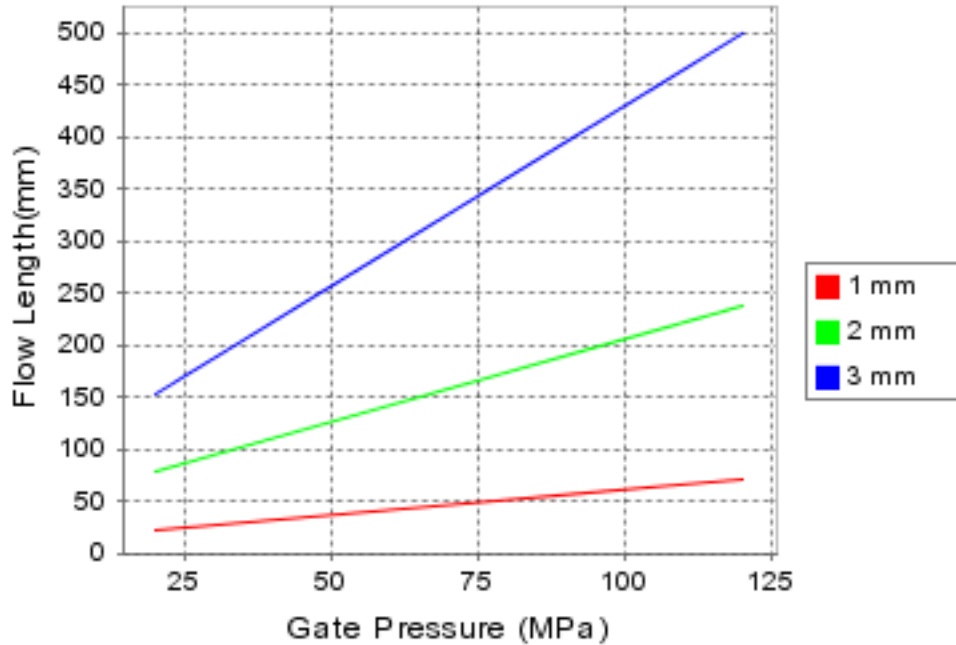

**Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.**

**® Moldflow is a registered trademark of the Moldflow Corporation.**

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.  
4) Own measurement according to UL.

Source, GMD, Last Update: 04/21/2005

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA. DISCLAIMER: THE MATERIALS AND PRODUCTS OF THE BUSINESSES MAKING UP THE GE PLASTICS UNIT OF GENERAL ELECTRIC COMPANY, ITS SUBSIDIARIES AND AFFILIATES ("GEP"), ARE SOLD SUBJECT TO GEP'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, GEP MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (I) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (II) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING GEP MATERIALS, PRODUCTS, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN GEP'S STANDARD CONDITIONS OF SALE, GEP AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS OR PRODUCTS DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of GEP's materials, products, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating GEP materials or products will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of GEP's Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by GEP. No statement contained herein concerning a possible or suggested use of any material, product or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of General Electric Company or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product or design in the infringement of any patent or other intellectual property right.

\* Lexan is a trademark of the General Electric Company

© 1997-2007 General Electric Company. All rights reserved